

# Sutter Place Select 52"

## 52 Inch Sutter Place Select Fan AP

339211AP (Antique Pewter)

Project Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Qty: \_\_\_\_\_  
 Comments: \_\_\_\_\_

### Product Information


Product ID	339211AP
Finish	Antique Pewter
Blade Finish	Light Cherry/Dark Cherry
Collection	Sutter Place Select 52"

### Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	160	4500	76	.49	59
Med	113	3196	114	.35	28
Low	62	1602	169	.2	10



### Dimensions

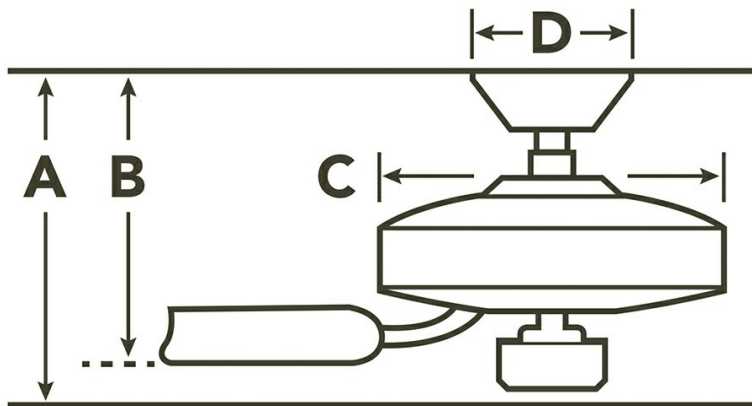

Downrod	A	B	C	D
1.00 OD X 4.00	18.00	10.75	12.00	5.25
FLUSH MOUNT	15.25	8.00	12.00	5.25

### Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	52"
Blades Reversible	No
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.00
Downrod 2	FLUSH MOUNT

Pull Chain - In project applications using multiple ceiling fans, alternative remote controls may be required. Please contact Kichler Advanced Product Solutions at 844-542-4537 to confirm your project requirements.

#### Primary Control System

Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	Yes, Dual Mount Included
Lead Wire Length	78.00"
Motor Size	153MM X 15MM
Motor Type	AC

### Downlight

Downlight Included	Yes
Light Source	Incandescent

# Sutter Place Select 52"

## 52 Inch Sutter Place Select Fan AP

### 339211AP (Antique Pewter)

Project Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Qty: \_\_\_\_\_  
 Comments: \_\_\_\_\_

### Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
Antique Pewter	339211AP	SATIN ETCHED	LIGHT CHERRY	DARK CHERRY
Oil Brushed Bronze	339211OBB	UMBER ALABASTER	WALNUT	CHERRY
Satin Natural White	339211SNW	WHITE ALABASTER	SATIN NAT WHITE	SATIN NAT WHITE
Olde Bronze	339211OZ	UMBER ETCHED	WALNUT	CHERRY
Matte White	339211MWH	WHITE ALABASTER	MATTE WHITE	MATTE WHITE
Sterling Gold	339211SGD	UMBER ETCHED	WALNUT	STERLING GOLD

### Control Options

Product ID	Descr
337001WH	Universal Remote Control
337010ALM	Fan 4 Speed-Light Dimmer
337010IV	Fan 4 Speed-Light Dimmer
337010WH	Fan 4 Speed-Light Dimmer
337011ALM	Fan Light Dimmer Control
337011IV	Fan Light Dimmer Control
337011WH	Fan Light Dimmer Control
337012ALM	4 Speed Fan Slide Control
337012IV	4 Speed Fan Slide Control
337012WH	4 Speed Fan Slide Control
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function
371042MUL	56K Wall Control System Basic
3R400AP	CoolTouch Control System R400

Downlight Bulb Included	Included
Downlight Bulb Type	B10
# of Bulbs/LED Modules	3
Watts	59/28/10
Max or Nominal Watt	60W
Glass Description	Satin Etched
Optional Light Kit Available	No

### Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty

### Installation

Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Hanging Weight	18.61 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet